


BR250S

METAL TUBE FLOW METER BR250S – SPRING TYPE



Vertical Flow Direction

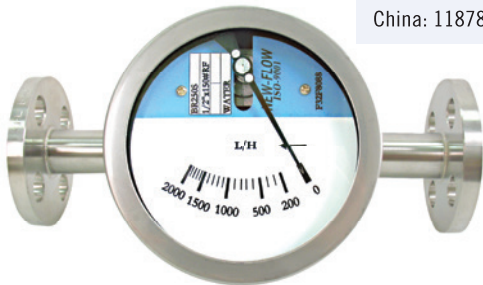

Horizontal Flow Direction

Ex d IIB + H₂ T6
工電(2015)第00151號

CE PC

HART COMMUNICATION PROTOCOL

PATENT NO.

Taiwan: M338981 / M332936
China: 1187801

Technical Data

BR250S for high flows of gas, liquid, steam and oil

Case Material: Aluminum alloy case with paint; SS316 available

Body Wetted Parts Material: SS316, others on request, indication via magnetic coupling (no sealed)

Lens Material: Safety Glass

Scales Calibrated: in l/h, m³/h, kg/h, %, etc.

Flow Rates For:

– Water: 30 l/h up to 120,000 l/h (special ranges on request)

– Air: 0.8 Nm³/h up to 1,200 Nm³/h (special ranges on request)

Connection Type: Only Flange Type

Connection Size: ½"~5"

Mounting: Vertical and Horizontal available

Mounting Length: 250mm standard; Connection size bigger than 3": mounting length is 300mm; 300mm for explosion proof.

Protection Class: IP66 or Explosion proof, Class I, Groups B, C & D; Class II, Groups E, F & G; NEMA 4, 7, 9

Accuracy: ±2.5% F.S (±2.0% F.S option)

Max. Pressure: 40 kg/cm² (standard); Option: up to 100 kg/cm²

Temperature: -50°C to +200°C (standard); up to 400°C on request

Alarm Switch: Micro switch, Inductive switch, Reed switch available

LCD Display: available


*HART® Communication: available

Two Wire Transmitter with HART® Protocol:

–Galvanic Isolation

–Suitable for application in SIL 2 installations

Principle

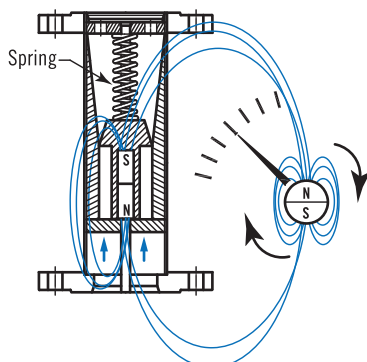


Dimensions-mm

IP66


Case Type: (A-1) Rectangle Bolt Tight Type

Housing Material: Aluminum alloy case with paint

1. Up to 200°C:

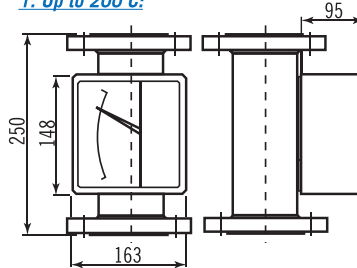

2. Up to 400°C c/w cooling element:




IP66


Case Type: (B-1) Round Bayonet Ring Type (only for indicating)

Housing Material: SS316

1. Up to 200°C:

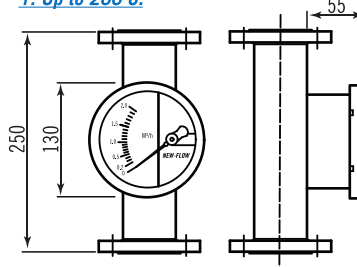

2. Up to 400°C c/w cooling element:



IP66


Case Type: (A-2) Round Screw Tight Type

Housing Material: Aluminum alloy


Case Type: (B-2) Round Screw Tight Type

Housing Material: SS316

1. Up to 200°C:

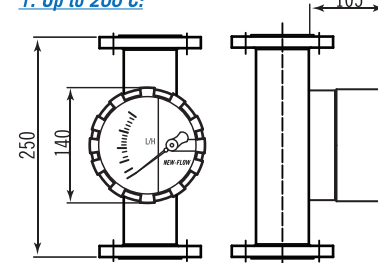

2. Up to 400°C c/w cooling element:




Explosion Proof


Class I, Groups B, C & D; Class II, Groups E, F & G; NEMA 4, 7, 9

Ex II 2 G Ex d IIB + H₂ Gb
II 2 D Ex tb IIIC Db IP66

1. Up to 200°C:

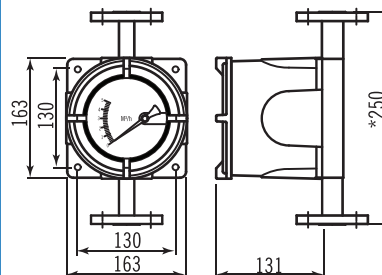



2. Up to 400°C c/w cooling element:



*Mounting length: 250mm standard
Connection size bigger than 3", mounting length is 300mm.


Alarm / Analog Output

BR-250S/GS-M (Micro Switch)

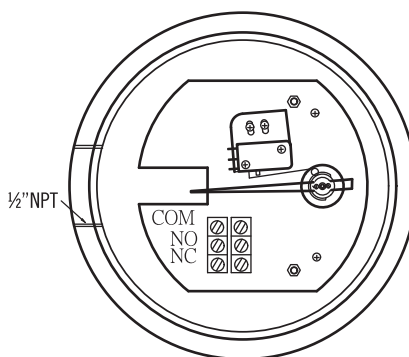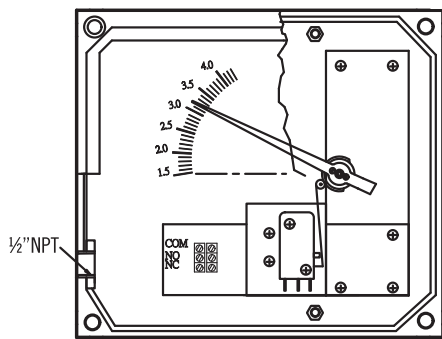

Adjustable Micro Switch, Series BR250S/GS-M
 1 adjustable alarm contact
 Load: 5A/125VAC, 5A/250VAC, 2A/30VDC
 Temperature: -25°C~+100°C (AMB)
 Hysteresis: ±10% F.S (Dead Band)


BR-250S/GS-R (Reed Switch)

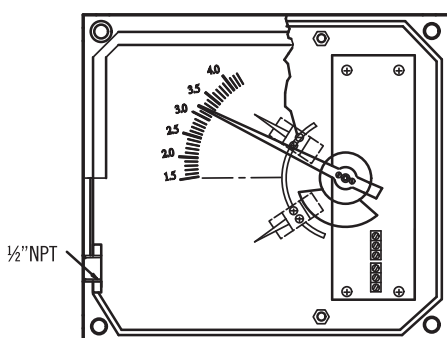

Alarm Switch: One or Two setting point, form A bistable type (N.O type)
 Hysteresis: ±10% F.S (Dead Band)
 Switch Rating: AC 125V 0.5A / DC 100V 10W / Max. DC 250V < 40mA

- 1 adjustable alarm**
 Contact setting point should be within 10% to 100% of F.S
- 2 adjustable alarm**
 The second setting point should be a gap 40% from first setting point.

BR-250S/GS-C (Inductive Switch)

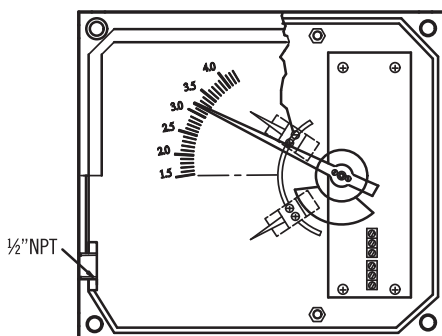

Adjustable inductive alarm switch
 Hysteresis: ±1% F.S (Dead Band)
 Inductive sensors slotted type: 3.5mm slot switch
 DC. voltage 2 wire's to DIN19234 (NAMUR) for use in hazardous areas.


- Power supply: 8 VDC (Ri.approx. 1kΩ)
- Current consumption: Active face uncovered 3mA; Active face covered 1mA
- Ambient temp.: -25°C ~ +100°C

Isolated barriers output relay for inductive sensor:


- Rail mounting
- Control circuit EEx ia IIC
- EMC acc to NAMUR NE21
- Contact loading 250 VAC 2A SPDT 40 VDC 2A

- 1 adjustable alarm**
 Contact setting point should be within 10% to 100% of F.S
 For 24VDC: KFD2-SR2-Ex1.W
 115VAC: KFA5-SR2-Ex1.W
 230VAC: KFA6-SR2-Ex1.W

- 2 adjustable alarm**
 The second setting point should be a gap 65% from first setting point.
 For 24VDC: KFD2-SR2-Ex2.W
 115VAC: KFA5-SR2-Ex2.W
 230VAC: KFA6-SR2-Ex2.W

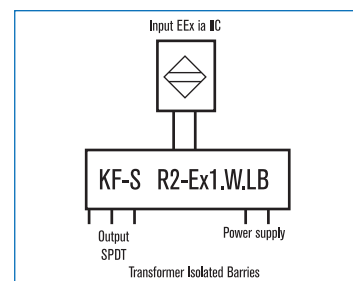


BR-250S/GT (Analog Output)

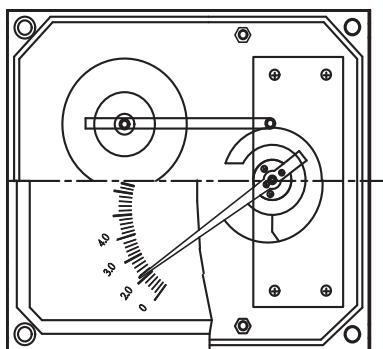


Electric Transmitter BR-250S/GT
 Analog output available: 4~20mA (2-wire)
No Alarm Switch Available
 Power Supplier: 24VDC
 Temperature: +25°C ~ +100°C (AMB)

Flow Direction Type

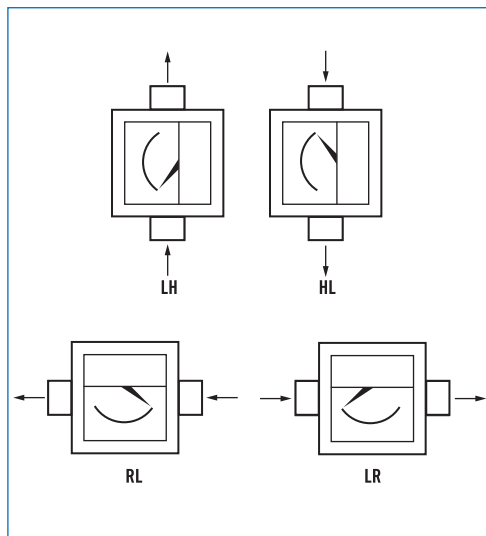

Damping Mechanical (Option Function)

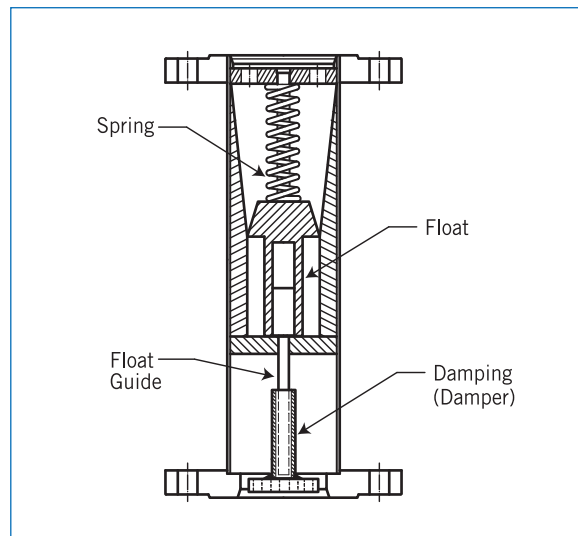

Standard Scales

Tube	L/H 20°C Water	NM ³ /H Air 0°C 1.013bar	Pressure Loss psig	Connection	Accuracy
BR250S01	30 ~ 300	0.8 ~ 8	≤3.5	1/2"	±2.5% F.S
BR250S02	40 ~ 400	1 ~ 10	≤3.8	1/2"	±2.5% F.S
BR250S03	50 ~ 500	1.2 ~ 12	≤3.7	1/2"	±2.5% F.S
BR250S04	70 ~ 700	1.7 ~ 17	≤3.6	1/2"	±2.5% F.S
BR250S05	80 ~ 800	2 ~ 20	≤3.8	1/2"	±2.5% F.S
BR250S06	100 ~ 1000	2.7 ~ 27	≤4.0	1/2"	±2.5% F.S
BR250S07	150 ~ 1500	4 ~ 40	≤4.2	1/2"	±2.5% F.S
BR250S08	180 ~ 1800	5 ~ 50	≤4.5	1/2"	±2.5% F.S
BR250S09	150 ~ 1500	4 ~ 40	≤3.8	3/4"	±2.5% F.S
BR250S10	200 ~ 2000	6 ~ 60	≤4.0	3/4"	±2.5% F.S
BR250S11	300 ~ 3000	9 ~ 90	≤3.4	1"	±2.5% F.S
BR250S12	400 ~ 4000	12 ~ 120	≤3.6	1"	±2.5% F.S
BR250S13	600 ~ 6000	15 ~ 150	≤3.9	1"	±2.5% F.S
BR250S14	600 ~ 6000	15 ~ 150	≤3.6	1½"	±2.5% F.S
BR250S15	800 ~ 8000	24 ~ 240	≤3.8	1½"	±2.5% F.S
BR250S16	1000 ~ 10000	30 ~ 300	≤3.9	1½"	±2.5% F.S
BR250S17	1200 ~ 12000	35 ~ 350	≤4.3	1½"	±2.5% F.S
BR250S18	1200 ~ 12000	35 ~ 350	≤3.2	2"	±2.5% F.S
BR250S19	1600 ~ 16000	50 ~ 500	≤3.4	2"	±2.5% F.S
BR250S20	2000 ~ 20000	60 ~ 600	≤3.8	2"	±2.5% F.S
BR250S21	2500 ~ 25000	70 ~ 700	≤4.1	2"	±2.5% F.S
BR250S22	2000 ~ 20000	70 ~ 700	≤3.0	2½"	±2.5% F.S
BR250S23	3000 ~ 30000	80 ~ 800	≤3.2	2½"	±2.5% F.S
BR250S24	3000 ~ 30000	90 ~ 900	≤3.4	3"	±2.5% F.S
BR250S25	4000 ~ 40000	120 ~ 1200	≤3.7	3"	±2.5% F.S
BR250S26	5000 ~ 50000	-----	≤3.6	4"	±2.5% F.S
BR250S27	6000 ~ 60000	-----	≤4.2	4"	±2.5% F.S
BR250S28	10000~100000	-----	≤3.8	5"	±2.5% F.S
BR250S29	12000~120000	-----	≤4.3	5"	±2.5% F.S

NOTE

Performance Technical Data are effective with date of issue and are subject to change without prior notice.

