

VARIABLE AREA TYPE FLOW METER (ROTAMETER)

N-TYPE

Operation Principle

The variable area flow meter content a float & taper tube. The fluid flow through the taper tube and force up to the float. The flow rate is measured as a function of the area of the opening. This area displayed as the float that is free to move to produce the varying area.

Technical Data

A. Measuring The Flow Rate For

- Gases & Liquid
- Chemical process system
- Water treatment system
- Industrial flow system

B. Service Condition

- Viscosity: ≤ 3 cP
- Max. working temperature: Metal: 100°C; Plastic: 60°C
- Max. working pressure:
 - (1) Body material: NS: 15 kg/cm², NI: 15 kg/cm², NV: 6 kg/cm²
 - (2) Glass tube: Borosilicate glass 6 kg/cm² for 10A~50A;
5 kg/cm² for 65A~80A; 4 kg/cm² for 100A~150A;
 - (3) P.C tube: 10 kg/cm², Instant pressure: 15 kg/cm²

C. Alarm Switch Available (N.O)


- Switch rating: AC 125V 0.5A / DC 100V 10W / Max. DC 250V < 40 mA

D. Accuracy: $\pm 2.5\%$ F.S

Approvals:



Dimensions

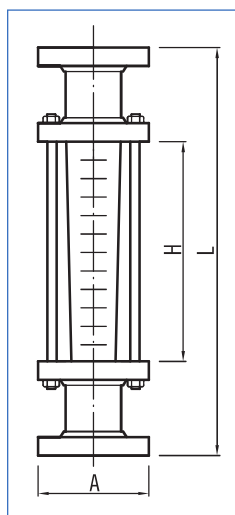

unit=mm

Range Size	H ₂ O (Max.) L/Min	Air (Max.) NL/Min	Dimension			
			Flange	L	H	A
10A	0.1~1.0	2~20	3/8"	230	103	—
15A	1~10	20~200	1/2"	280	160	—
20A	2~20	30~300	3/4"	340	190	—
25A	5~50	100~1000	1"	340	190	—
32A	10~100	200~2000	1 1/4"	350	205	—
40A	20~200	300~3000	1 1/2"	350	205	—
50A	40~400	500~5000	2"	350	205	—
65A	60~600	600~6000	2 1/2"	350	205	—
80A	80~800	900~9000	3"	410	250	—
100A	100~1000	1500~15000	4"	430	260	—
125A	200~2000	3000~30000	5"	460	260	—

Ordering Information

N-Type	Code	Model	Code	Float Material
	NS	Wetted parts are stainless steel		(1) SS304 (2) SS316 (3) P.V.C (4) P.P.
	NI	Wetted parts are steel		(5) PVDF (6) Teflon (0) option
	NV	Wetted parts are plastic		
		Code Size		Code Seal Material
		(1) 10A (2) 15A (3) 20A (4) 25A (5) 32A (6) 40A		(1) NBR (2) Viton (3) Teflon
		(7) 50A (8) 65A (9) 80A (10) 100A (11) 125A		Code Protection Supporter Material
		Code Connection Rating		(1) SS304 (2) SS316
		(1) JIS 5K (2) JIS 10K (3) ANSI 150# (4) ANSI 300#		Code Flow Range
		Code Body Material		L 0.1~2000 L/min for liquid
		(1) SS304 (2) SS316 (3) SS316L (4) P.V.C		G 2~30000 NL/min for gases
		(5) P.P (6) PVDF (7) Option		Code Alarm Switch
		Code Indicating Tube Material		1R One setting point
		(1) Borosilicate glass (2) PC		2R Two setting point
				0 Without alarm
N-Type			+	